



Parts Manual

04-17

215TS-002



1115 Rail Drive
P.O. Box 717
Ashland, WI U.S.A.
Toll Free: (877) 634-4622
Business: (715) 682-4622
Fax: (715) 682-9717

Ashland Industries
Crafting Quality since 1953!

www.ashlandind.com
www.scraperdrawbar.com

Table of Contents

Categorized Listing

ASHLAND SCRAPERS	1
Introduction	1
Operation and Maintenance	2
Safety Guidelines	5
Assembly - 800042-215	6
Assembly - Main - WG-215-002	7
Transport Locks (TS)	8
Ashland Hitch - 601135	9
Apron - 700073	10
Bowl & Frame - 701017	11
Front Section - 704008	13
Push-Off - 700084	14
Rear Wheel (215)	16
Hydraulic Schematic	17
Apron Cylinder - 400047	18
Lift Cylinder - 400224	19
Push-Off Cylinder - 400046	20
Decals (215TS2)	21
Hydraulic Accumulator	23
Hydraulic Manifold - A125174	24
Hydraulic Valve Ports	25
Hydraulic Valve Seals	26
Service: Grease Locations TS	27
Hub-Axle Assembly	28
Hub-Axle Disassembly	29
Scraper Specifications 215TS2	30
Tire Inflation	31
Maintenance Check List	32
Service: Tire Service	33
Tools Required	34
Troubleshooting	35
Warranty Statement	36

Table of Contents

Alphabetized Listing

A			Warranty Statement	36
	Apron - 700073	10		
	Apron Cylinder - 400047	18		
	Ashland Hitch - 601135	9		
	ASHLAND SCRAPERS	1-36		
	Assembly - 800042-215	6		
	Assembly - Main - WG-215-002	7		
B				
	Bowl & Frame - 701017	11		
D				
	Decals (215TS2)	21		
F				
	Front Section - 704008	13		
H				
	Hub-Axle Assembly	28		
	Hub-Axle Disassembly	29		
	Hydraulic Accumulator	23		
	Hydraulic Manifold - A125174	24		
	Hydraulic Schematic	17		
	Hydraulic Valve Ports	25		
	Hydraulic Valve Seals	26		
I				
	Introduction	1		
L				
	Lift Cylinder - 400224	19		
M				
	Maintenance Check List	32		
O				
	Operation and Maintenance	2		
P				
	Push-Off - 700084	14		
	Push-Off Cylinder - 400046	20		
R				
	Rear Wheel (215)	16		
S				
	Safety Guidelines	5		
	Scraper Specifications 215TS2	30		
	Service: Grease Locations TS	27		
	Service: Tire Service	33		
T				
	Tire Inflation	31		
	Tools Required	34		
	Transport Locks (TS)	8		
	Troubleshooting	35		
W				

Introduction

Thank you for choosing an Ashland scraper for your earthmoving needs. Years of research, testing and successful application have been spent to ensure quality and maximum performance for our customers.

QUALITY POLICY

It is our mission to exceed our customers' expectations in quality, delivery, and cost through continuous improvement and customer interaction.

Please read and understand this manual before attempting to attach or operate this scraper. This manual should always remain with the machine. Be sure and fill out and send in the owners registration form at the beginning of this manual, or you may fill out the form on-line by going to ashlandind.com and click on "Register your Machine" in the parts section drop-down. If you have questions, please feel free to call or email us. You can visit us on-line at www.ashlandind.com.

Ashland Industries hours of operation are 8:00 a.m. to 5:00 p.m. CST. We can be reached toll free at: 877-634-4622.

SCRAPER ID NUMBER

The serial number plate for the scraper is located on the right rear area of the scraper. The letter and numbers stamped identify the serial number, model number and capacity of the scraper. Please record this serial number for use in ordering parts, warranty issues and to track your equipment if it is ever stolen.

References to serial number breaks on parts are located in the manual with a reference sequence of XXXXX-XXXXX. The beginning number records the serial number start of the use of that part. The ending number is the final serial number use of the part within this machine.



IMPORTANT

Parts must be ordered through your local authorized ASHLAND dealer. Be sure to state MODEL and SERIAL NUMBER of your machine. Ashland Industries weldable replacement parts are also available to rebuild, modify or update your scraper to current factory specifications.

ASHLAND SCRAPERS**Operation and Maintenance**

Your Ashland scraper is a durable piece of equipment and with proper care will yield many years of trouble free operation. However, the life of your scraper can be severely shortened by poor maintenance. You must follow consistent maintenance practices and use good quality grease and hydraulic oil (compatible with the power unit's hydraulic system) to insure the longer, most productive use from your scraper.

Your scraper should be greased at all points where grease fittings are provided. **REMOVE TRANSPORT LOCKS** prior to operation. Next, extend and retract all cylinders several times to force out any air from the hydraulic cylinders and lines. Check the oil levels in the tractor hydraulic system and add to maintain the proper level. Care should be used when adding oil or when disconnecting any oil line to keep all dirt out of the oil as dirt is a major factor in the failure of hydraulic components.

When your scraper is placed into operation, the operator will have to "feel out" the amount of depth of cut to obtain maximum loading efficiency. This is usually accomplished by taking a lesser and more uniform cut; however, some soil conditions such as loose sand may require a "pumping action" obtained by taking successive deep cuts and lifting out of cut as the tractor begins to lose power or traction.

- After 8 hours of operation, all bolts should be checked and tightened if necessary and all grease fittings lubricated. Check tire pressures daily. Also, check pins and cutting edges for signs of wear.
- After 50 hours work, all bolts should be rechecked and tightened if necessary. Check wheel bearings and adjust if necessary.
- Check wheel lug nut torque.
 - After first 2 hours of operation.
 - Recheck daily for the next 2 weeks.
 - Tighten wheel lug nuts in a star pattern.
 - Torque wheel lug nut (see Torque Specifications).
- After 300 hours work, clean and repack wheel bearings and replace, if necessary, cutting edges, worn pins, etc.



Failure to replace worn cutting edges may result in unnecessary wear to the earthmover sides and floor.

ASHLAND SCRAPERS**Operation and Maintenance**

Before starting a job, make sure Diggers Hot Line has been contacted and all underground utilities have been properly located (electric, phone and pipelines). Have a clear understanding of all local, OSHA and MSHA rules that apply to the job. Beware of your environment and keep others a safe distance from the machine while familiarizing yourself with the machine's controls. The scraper requires a power source with **TWO** 4-way (double acting) hydraulic control valves.

**Scraper damage can occur if:**

1. The scraper is running over the haul road with the bowl fully raised. On scrapers that have factory installed nitrogen over hydraulic accumulators, the lift cylinders should be lowered 3 to 4 inches to allow the cushioned ride to work properly.
2. The heaped payload repeatedly exceeds the design ISO 6485 Earth-moving machinery-Tractor-scraper volumetric rating.
3. The fully loaded scraper exceeds the 10 mph on smooth haul roads and dramatically less on uneven haul roads.
4. The scraper is being top-loaded without the bowl being fully lowered to the ground prior to placing the material into the bowl.
5. The scraper is being used to level haul roads with the apron closed, not allowing material to enter the bowl.
6. The scraper is being used to load rock.
7. The scraper is being aggressively push loaded with a dozer.
8. A power unit that is above the horsepower rating is pulling the scraper.

These types of damage are not covered by warranty. Warranty only covers defects in material or workmanship and not abuse because of improper use.

Know the job:

1. Know the weight of the material to be moved.
2. Lay the job out to take advantage of grades when loading, if possible.
3. Keep hauls as short as possible.
4. Keep haul roads smooth.
5. If more than one unit is on the job, make sure the haul roads are one way and that the operators understand the direction.
6. Brief the operators as to what the job consists of so there is not misunderstanding.
7. Know the moisture content in the material to be moved.
8. Will water be needed for proper compaction?
9. Will drainage be a problem?
10. How many units will be needed to efficiently complete the job?

Transport the scraper safely:

1. Always empty scraper.
2. Clean all material from exterior of scraper.
3. Make sure all road rules are followed.
4. Use proper lighting and flagging.
5. Lower scraper bowls to provide just enough clearance over obstacles.
6. Transport at a safe speed to avoid roll over.
7. Reduce speed on curves and when going downhill.

ASHLAND SCRAPERS**Operation and Maintenance****Apron Opening Guidelines:**

You will need to determine the ideal opening for your soil condition. It is important to have the apron opened prior to loading. To receive the highest production possible, it is important to know the general characteristics of the material that you will be loading. In heavier soils like clay or gumbo, the soil will slab up and remain together after being cut by the blades. In lighter soils, like sand or dry loose top soil, the material will pile up or push after being cut by the blade. Use the suggestions listed below:

Topsoil with heavy vegetation (12" to 24" opening):

When cutting undisturbed soils, you will need to open the apron high enough to allow debris to easily enter the scraper bowl. If the apron is opened too high, the rolling up sod will fall out past the apron and hinder the incoming material. If the apron is not adjusted quick enough, the material will bunch or push ahead of the machine. If this happens, you should close the apron and pull out the cut quickly. If you wait too long, you may develop too large a pile to clear the scraper while rising out of the cut. This can cause the power unit to lose traction and possibly cause you to get stuck.

Clay or loamy material: (6" to 12" opening):

To cut clay or loam soils, lower the apron to approximately 6" to 12" between the blades and the bottom of the apron. When you first lower the bowl, you'll see the material being cut by the blades and entering the bowl. As you continue to move forward, small clumps will fall past the apron and develop a small pile ahead of the apron. By limiting this apron opening, the small pile will "blade off" any loose material ahead of the machine. Adjustments should be made if large objects such as rocks or deep gouges are within the cut.

Sand or loose topsoil (15" to 30" topsoil):

Loading sand or loose top soil is the most difficult type of soil to load. In combination with the larger apron opening, you'll want to operate at a faster ground speed. By traveling faster and lowering the blade deeper than normal, it forces the material into the scraper bowl.

We encourage you to experiment with different apron openings to determine the best condition for your jobsite.



The Apron is designed to capture material inside of the scraper bowl and should not be used as a large blade. Obstructions like large rocks or dense piles may cause the apron to bend inward after prolonged exposure to these conditions.

Safety Guidelines



Safety Signal Words: Please note the use of signal words such as DANGER, WARNING, and CAUTION paired with the safety messages on your scraper. The appropriate signal word for each safety message has been selected using the following guidelines:

- **Danger:** Indicates an imminently hazardous situation that, if not avoided, will result in death or serious injury. This signal word is limited to the most extreme situations—typically for machine components which, for functional purposes, cannot be guarded.
- **Warning:** Indicates a potentially hazardous situation that, if not avoided, could result in death or serious injury. For example, hazards that are exposed when guards are removed. This signal word may also be used to alert against unsafe practices.
- **Caution:** Indicates a potentially hazardous situation that, if not avoided, may result in minor or moderate injury. This signal word may also be used to alert against unsafe practices.

Operator safety is a main concern in designing and developing equipment. Designers and manufacturers include as many safety features as possible. However, every year many accidents occur which could have been avoided by extra thought and a more careful approach to handling equipment. The operator can avoid many accidents by observing the precautions in this section. To avoid personal injury, study the following precautions and insist those working with, or for you, follow them.


Replace any CAUTION, WARNING, DANGER or instruction safety decal that is not readable or missing. Locations of decals are indicated in this booklet.

Do not attempt to operate this equipment under the influence of drugs or alcohol.

Review the safety instructions in the operator's manual with all users annually.

Operators should be responsible adults who are familiar with machinery and trained in the equipment's operations. Do not allow persons to operate or assemble this unit until they have read this manual and the owner's manual and have developed a thorough understanding of the safety precautions and scraper operation.


Assembly - 800042-215

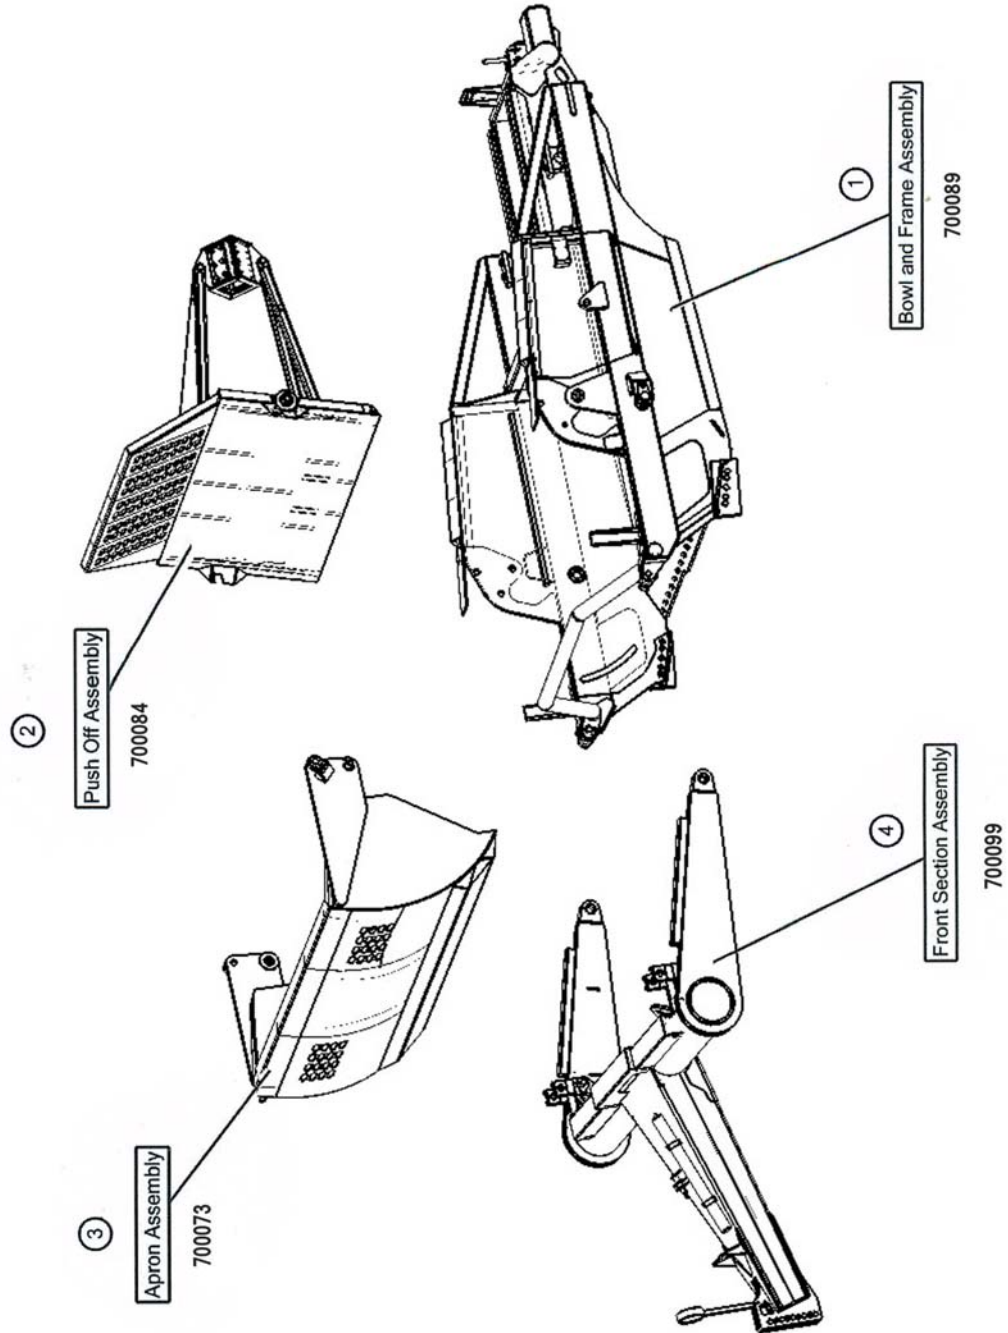

ITEM	PART	DESCRIPTION
	800042	215TS2 MAIN SCRAPER ASSEMBLY
1	700089	Bowl and Frame Assembly
2	700084	Push-Off Assembly
3	700073	Apron Assembly
4	700099	Front Section Assembly

ASHLAND SCRAPERS

Assembly - Main - WG-215-002

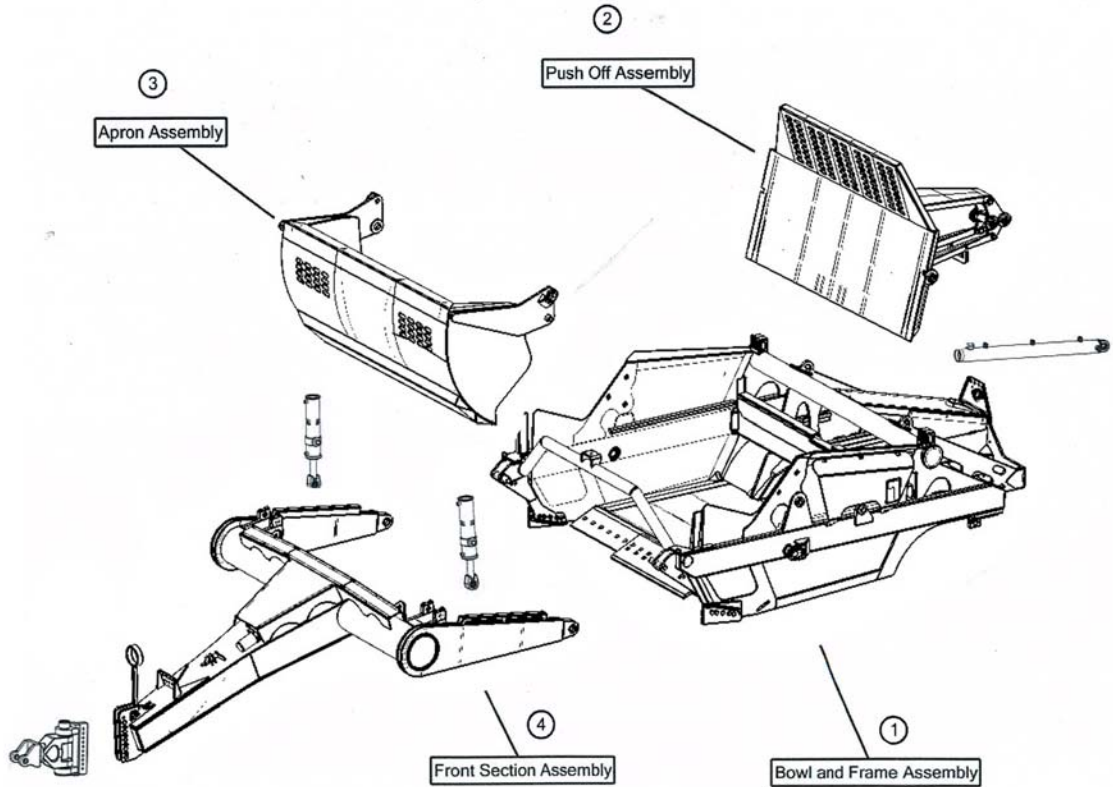

ITEM	PART	DESCRIPTION
	I-215TS2-002	BOWL AND FRAME ASSEMBLY 215
1	701017	Bowl and Frame Assembly
2	700084	Push-Off Assembly
3	700073	Apron Assembly
4	704008	Front Section Assembly


Transport Locks (TS)



PART	DESCRIPTION
A123320-20	Transport Lock


ASHLAND SCRAPERS

Ashland Hitch - 601135

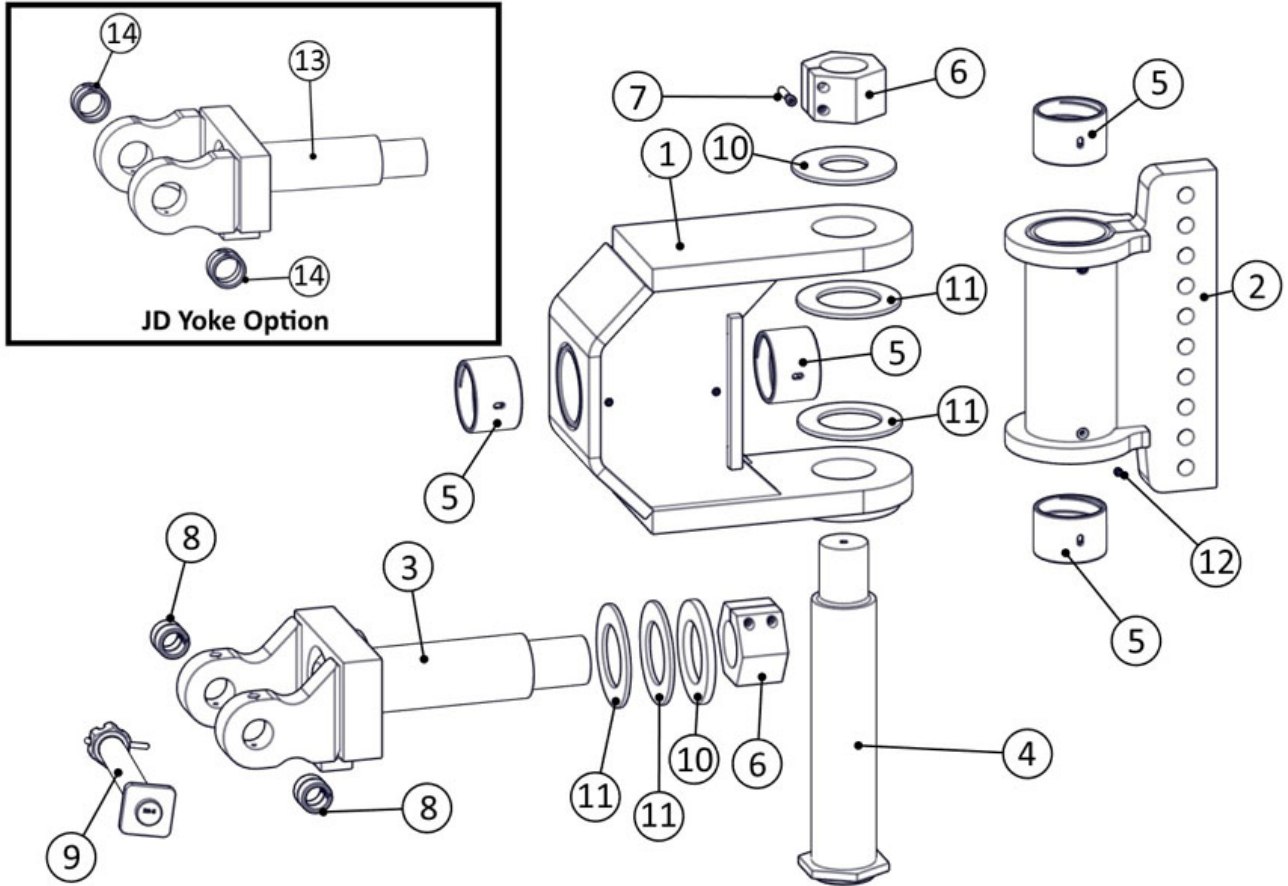


ITEM	PART	DESCRIPTION
1	601139	Hitch: Housing
2	601138	Hitch: Vertical 10-hole Bracket
3	601090	Yoke: Ashland Swivel
4	600925	Pin: Vertical 4"
5	400312	Bushing: 4 X 4 1/2" X 3"L
6	601026	Nut: Clamping 3"-8
7	AFB-00184	Bolt: 3/8 X 2" Cap Screw
8	A123343	Bushing: Ashland, Steel Spring
9	CNH-84260964	Hitch Pin w/nut cotter pin
10	501937	Washer: Steel, 3 1/8 ID
11	400318	Washer: UHMW-R 4 ID X 1/4"
12	14505	Fitting: Grease Zerk
13	601121	Yoke: JD, 60mm Swivel (Optional)
14	400216	Bushing: JD, Steel Spring (Optional)

Apron - 700073

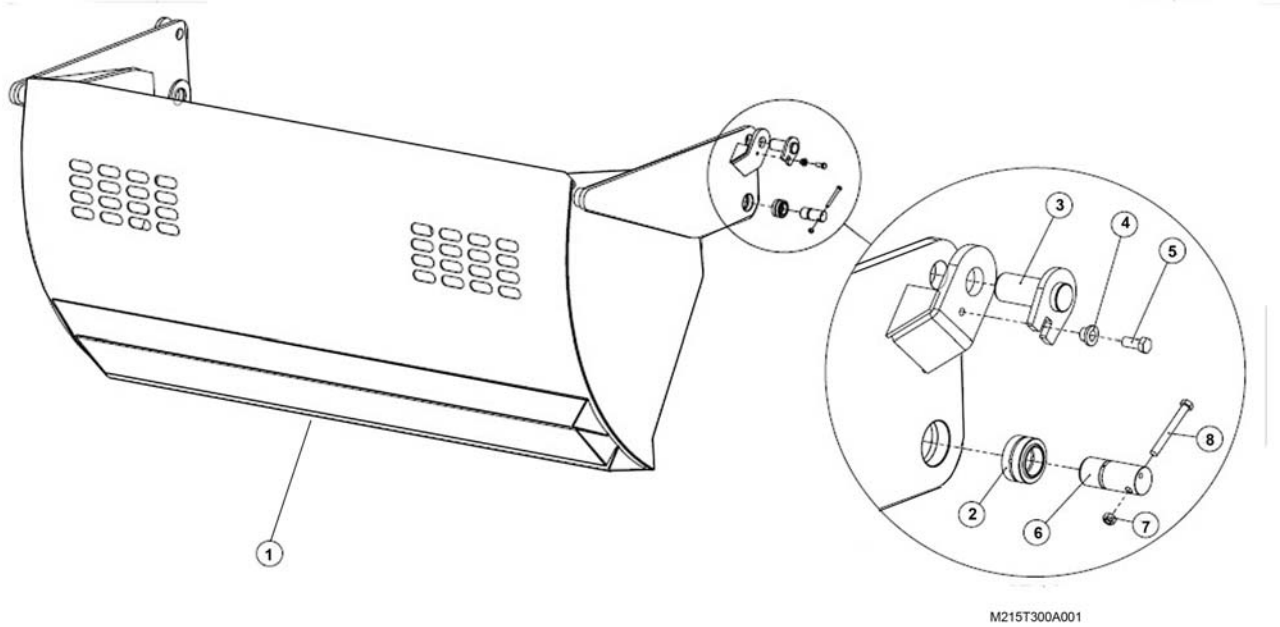

ITEM	PART	DESCRIPTION
1	700073	Apron
2	A125257-35	Bushing: 2" ID Ball Swivel
3	A123322-14	Pin: 2" x 4 1/4" L (for cyl. rod end)
4	A123358	Flanged Bolt Bushing
5	AFB-00079	Bolt: 5/8" X 1 1/2"
6	A123321-113	Apron Pivot Pin w/grease zerk
7	750500	Lock Nut: 1/2"
8	AFB-00012	Bolt: 1/2 X 4/12"


Bowl & Frame - 701017

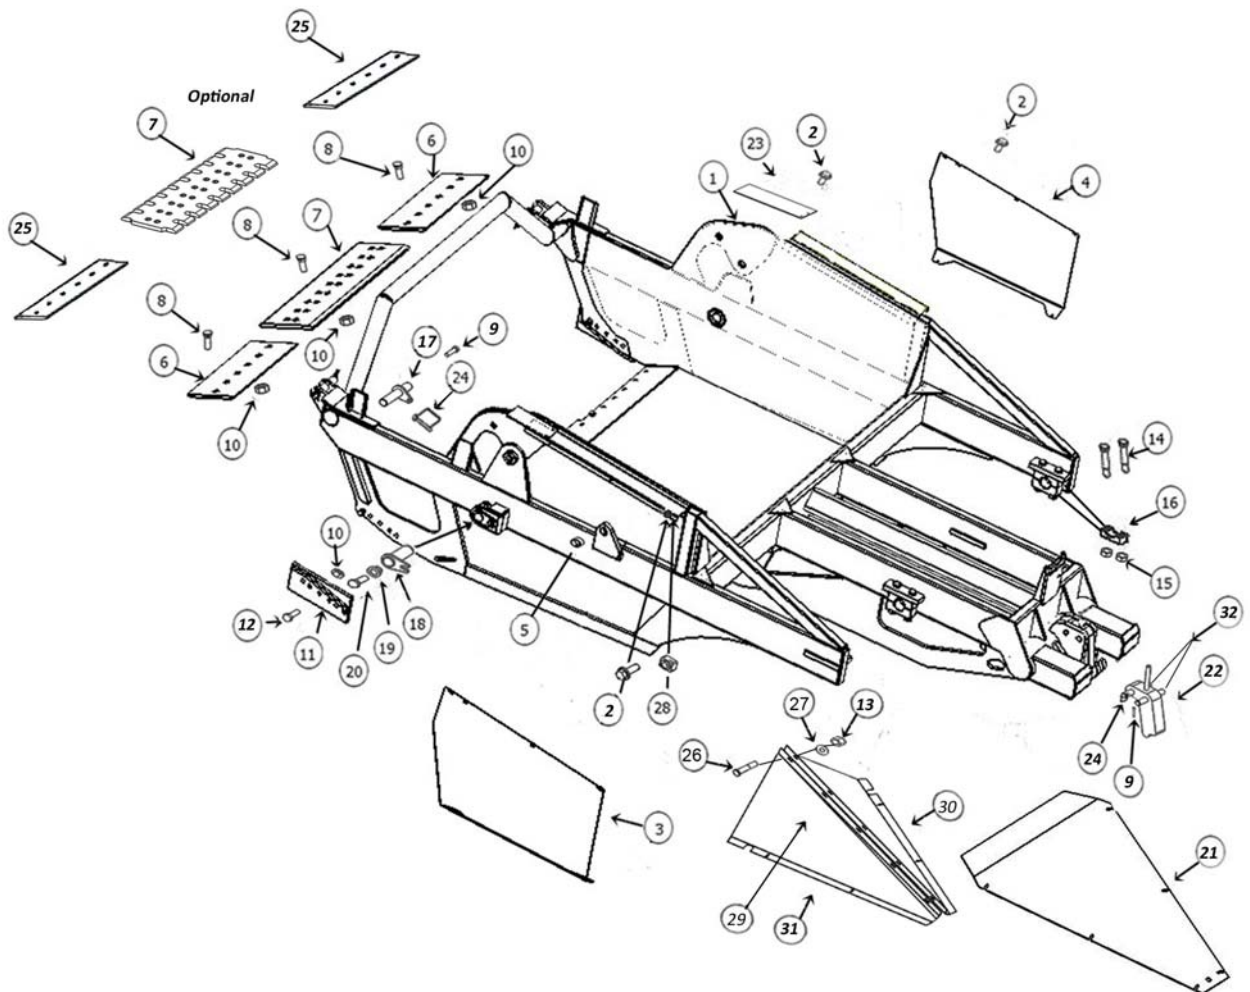

ITEM	PART	DESCRIPTION
1	701017	BOWL & FRAME ASSEMBLY 215
2	AFB-00094	Flanged Bolt: 3/8" NC X 1" L
3	123369-01	Left Cyld. Guard
4	502010	Right Cyld. Guard
5	A125018	Bushing: 2 3/8" OD X 2" ID X 1 1/4" L
6	A125103	Left & Right Straight Corner Blade
7	A125072	Center Blade, 18" Straight, Reversible
	A125072-SER	Center Blade, 18" Double Serrated, Reversible Option
8	PB1P-NC-100-0275	Plow Bolt: 1" NC X 2 3/4" L
9	AFP-00001	Cotter Pin
10	AFN-00012	Nut: 1" NC
11	A123357	Bank Shaver/Router Bit, Reversible L & R
12	AFB-00018	Bolt: 1" NC X 3" L
13	AFN-00065	Nut: 1/2" Hex
14	AFB-00109	Bolt: 1 1/4" NF X 9" L


ASHLAND SCRAPERS**Bowl & Frame - 701017**

ITEM	PART	DESCRIPTION
15	AFN-00032	Nut: 1 1/4" NF
16	A123321-65	Axle Mount
17	600221	Lift Cylinder Pin
18	A123321-09	Main Frame Pin
19	A123358	Flanged Bolt Bushing
20	AFB-00079	Bolt: 5/8" X 1 1/2" Hex Cap
21	123369-12	Standard Rear Dirt Shield
22	A123321-89	Pin Keeper
23	A123369-13	Dirt Shield Flap
24	A125006	Safety Snap Pin 1/4 X 2 1/4
25	500778	Finishing Blade
26	AFB-00013	Bolt: 1/2 X 2 1/2" Hex Cap
27	AFW-00009	Washer: 1/2" Flat
28	AFN-00041	Nut: 3/8" Hex Weld
29	600774	Top Loading Guard (Optional)-Complete
30	502325	Right Rear Dirt Shield
31	502326	Left Rear Dirt Shield
32	A123321-98	Rear Hitch Pins

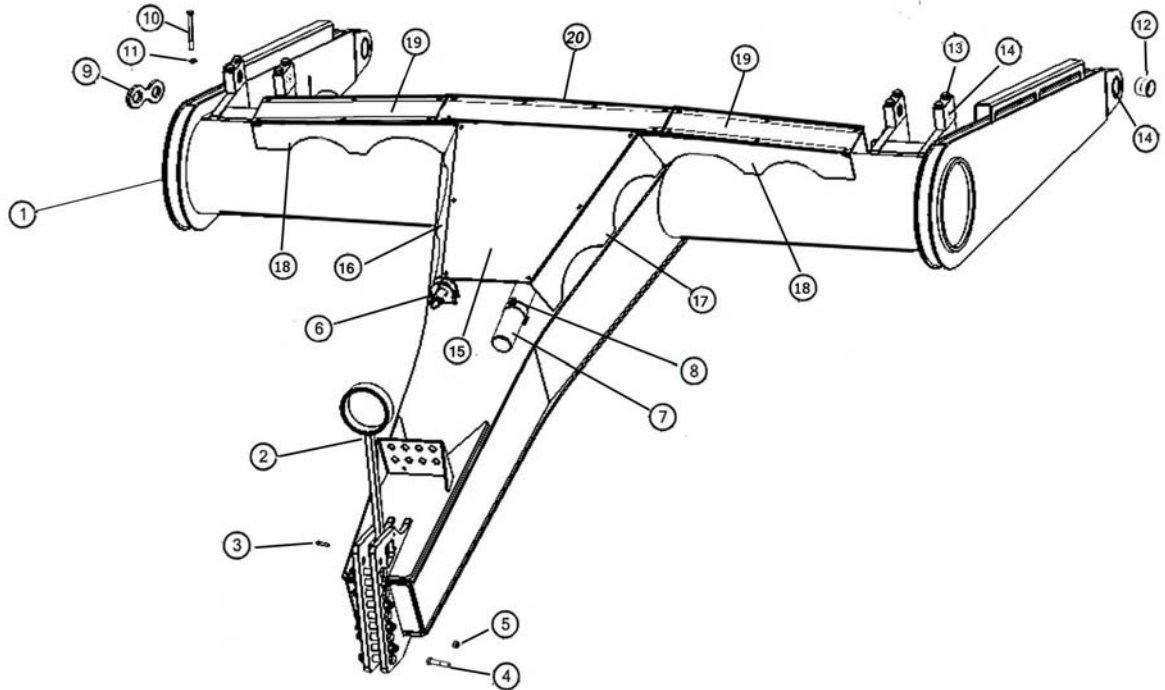ASHLAND SCRAPERS
Front Section - 704008


ITEM	PART	DESCRIPTION
1	704008	FRONT SECTION 215-220
2	600119C	Hold Holder Assembly
3	AFB-00033	Bolt: 1/2 X 2 1/2" Gr 8
4	AFB-00021	Bolt: 1 X 5 1/2" Gr8
5	AFN-00037	Nut: Lock 1"
6	600121	Lock Pin: Apron
7	A125005	Accumulator
8	A125009	Accumulator Bracket
9	A123320-20	Transport Lock
10	AFB-00039	Bolt: 3/4 NC X 5 1/2" Gr 8
11	AFW-00024	Washer: 3/4"
12	A123320-08	Bushing: Bronze
13	502143	Trunion Mount Block
14	14505	Grease Fitting
15	502508	Guard: Front Section Cover
16	502516	Guard: Front Section Right
17	502514	Guard: Front Section Left
18	502507	Guard: Front Section Upright
19	502513	Guard: Front Section Side Cover
20	502512	Guard: Front Section Rear Upright

Push-Off - 700084

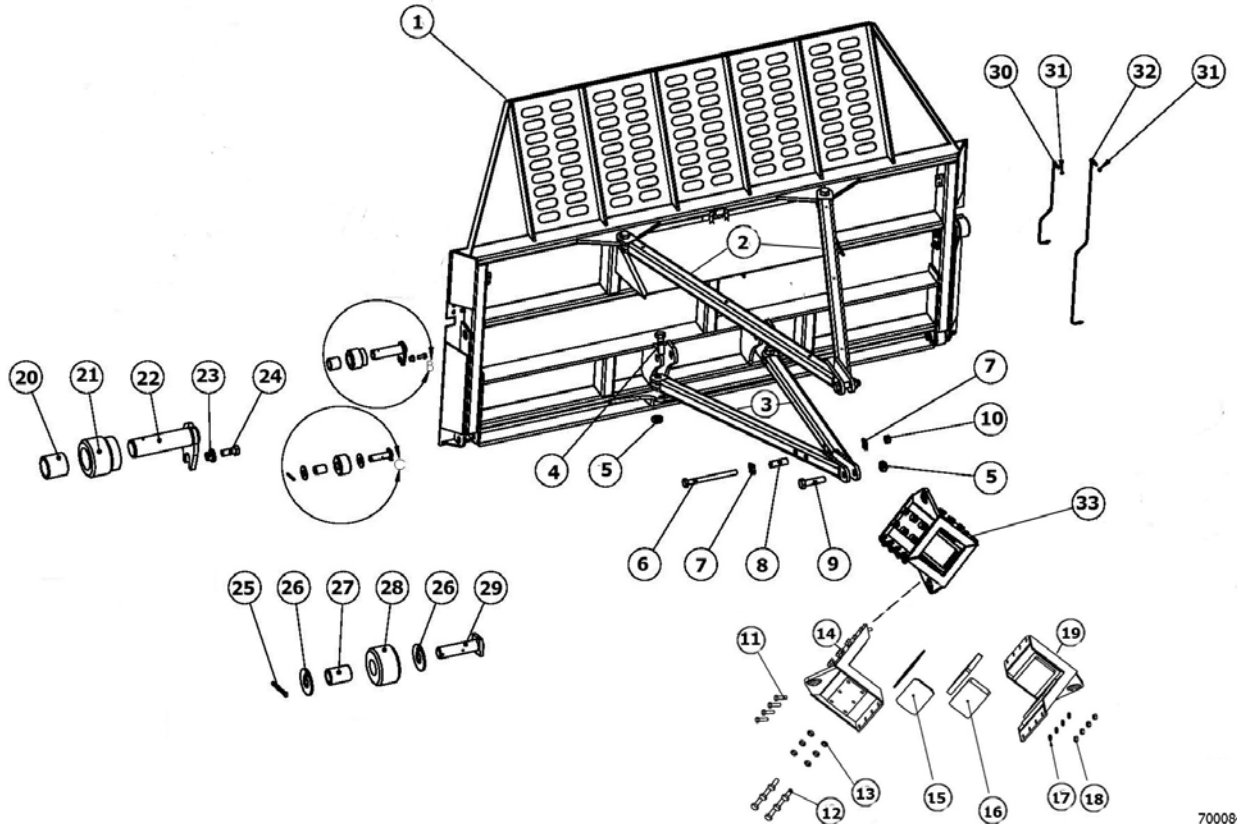


700084-M

ITEM	PART	DESCRIPTION
1	700084	Pushoff Assembly
2	123364-10	Saddle Tie-top
3	123364-20	Saddle Tie-Bottom
4	AFB-00076	Bolt: 1 1/4 Nf X 4"
5	AFN-00009	Lock Nut: 1 1/4" NF
6	AFB-00103	Bolt: 1 NF X 12"
7	AFW-00019	Washer: 1 X 2" Sq.
8	123323-48	Slide Saddle Leg Spacer
9	AFB-00075	Bolt: 1 1/4" X 5"
10	AFN-00001	Lock Nut: 1"
11	6684	Bolt: 5/8" NC X 2"
12	AFB-00060	Bolt: 3/4"NF X 2"
13	AFN-00023	Jam Nut: 3/4" NF
14	123364-14	Slide Saddle-Top Mount
15	123364-3	Shim Plate
16	123364-08	Pad: Slider Slide Saddle
17	8110	Washer: Lock 5/8"
18	7530	Nut: 5/8" NC

ASHLAND SCRAPERS**Push-Off - 700084**

ITEM	PART	DESCRIPTION
19	123364-15	Slide Saddle-Bottom Mount
20	A14039	Bushing: 2" ID X 2 3/8" OD X 2" Bronze
21	502049	Roller: Gate Hold Down
22	A123323-23	Pin: Upper Roller
23	A123358	Bushing: Pin Keeper w/flange
24	AFB-00079	Bolt: 5/8 NC X 1 1/2"
25	AFP-00001	Pin: Cotter 1/4 x 3"
26	AFW-00015	Washer: 1 1/4"
27	A10163	Bushing: 1 1/4 ID X 1 3/4 OD X 2 3/8L
28	A10164	Roller: Gate Front
29	A123323-21	Pin: Hold Down Roller
30	A125020	Hose Assy: 32" Grease Line
31	A125026	Fitting: Bulkhead Nut
32	A125021	Hose Assy: 54" Grease Line
33	A123364	Guide Box Slide Saddle Assembly


Rear Wheel (215)

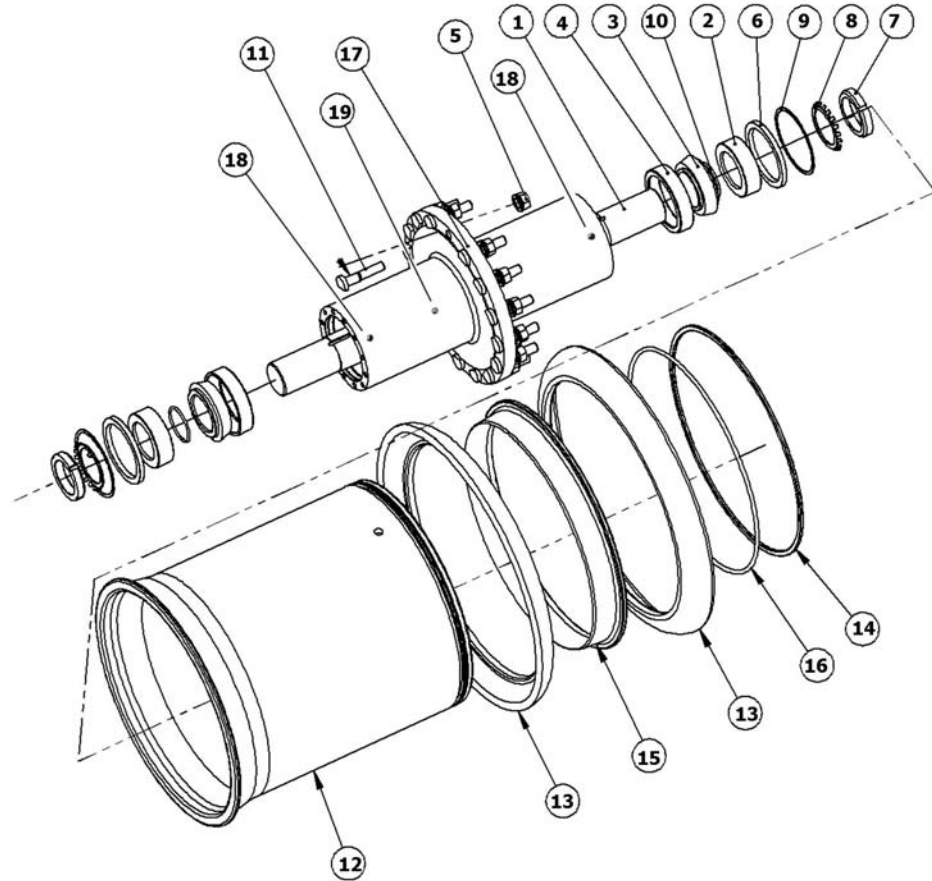

ITEM	PART	DESCRIPTION
1	500319	Axle
2	500327	Spacer-Bearing
3	A125016	Bearing
4	A125017	Bearing
5	A125229	Nut-22mm
6	A125232	Seal
7	A125233	Nut-Lock
8	A125234	Washer-Lock
9	A125235	Ring-Retaining
10	AHS-00148	O-Ring
11	A125237	Stud
12	500318	Rim Shell 25 x 25
13	A12041	Side Ring 25 x 25
14	A12042	Lock Ring 25 x 25
15	A12043	Bead Seat Band
16	A12047	O-Ring 3/8" x 25"
17	500347	Hub
18	14505	Fitting: Grease
19	A125466	Vent: Pressure Relief

Hydraulic Schematic

I-215TS2 HYDRAULIC SCHEMATIC
TRACTOR

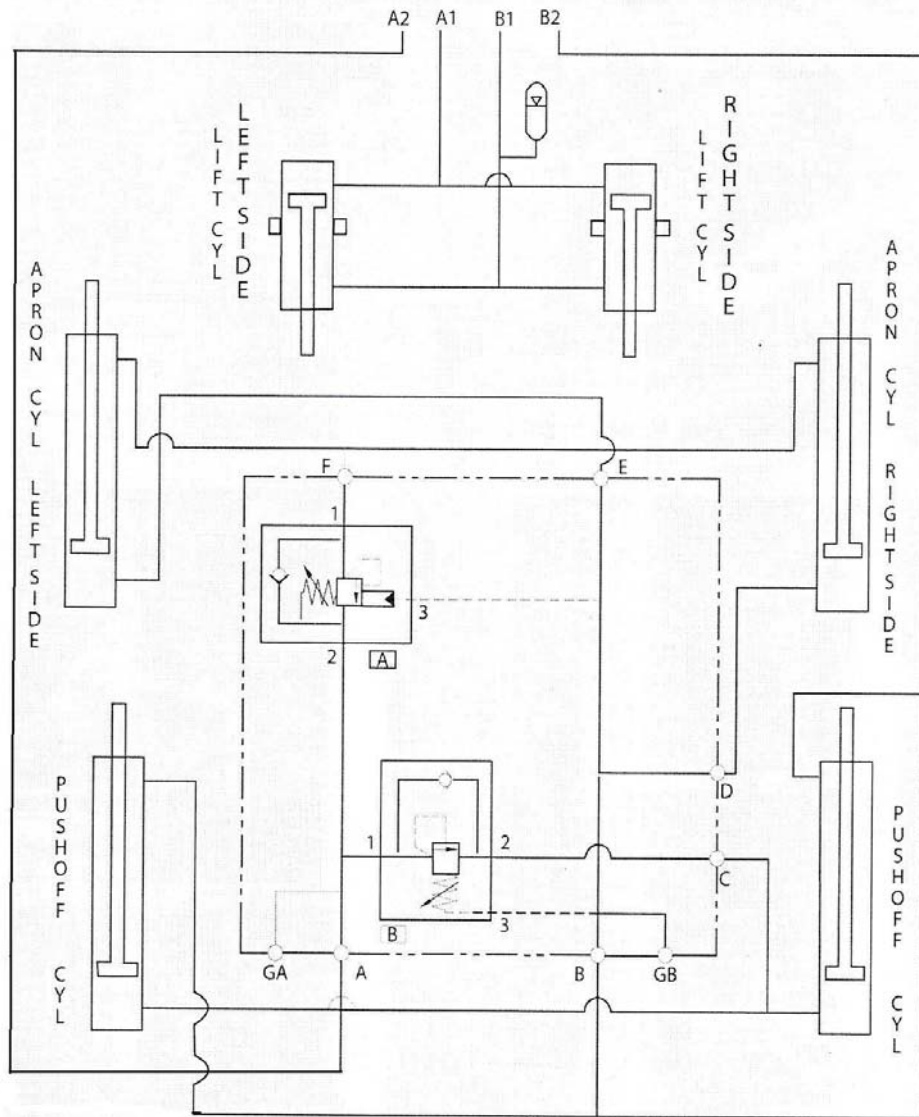

PORT GA AND GB are pressure test ports


A - Counter balance cartridge

B - Sequence cartridge

M180T400H012


ASHLAND SCRAPERS

Apron Cylinder - 400047

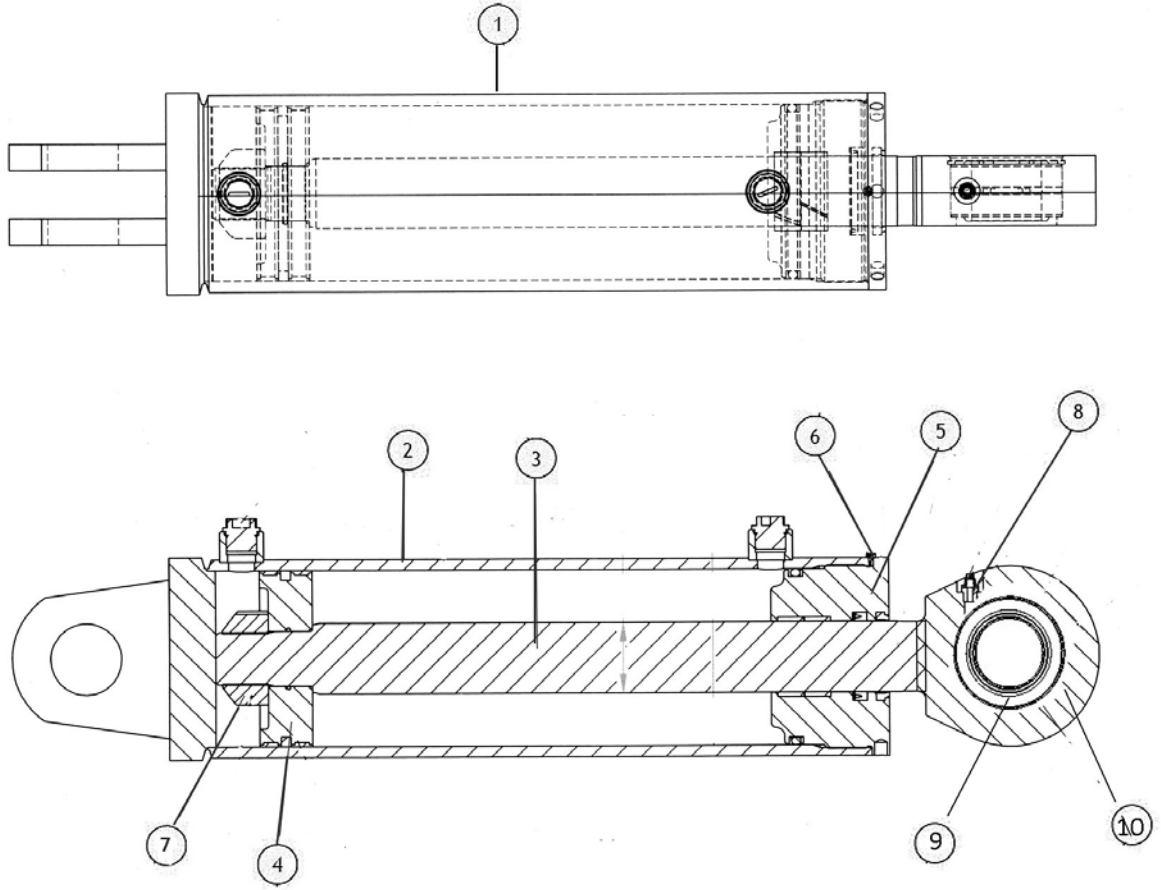

ITEM	PART	DESCRIPTION
1	400047	APRON CYLINDER (5 X 13")
2	J204146B	Barrel
3	J302792B	Rod
4	J401404A	Piston
5	J501491B	Rod Bearing Assembly
6	J711127A	Locking Screw
7	J712049A	Self Locking Nut
8	J717000A	Grease Fitting
9	A125257-35	Bushing
10	A125257-36	Snap Ring


Lift Cylinder - 400224

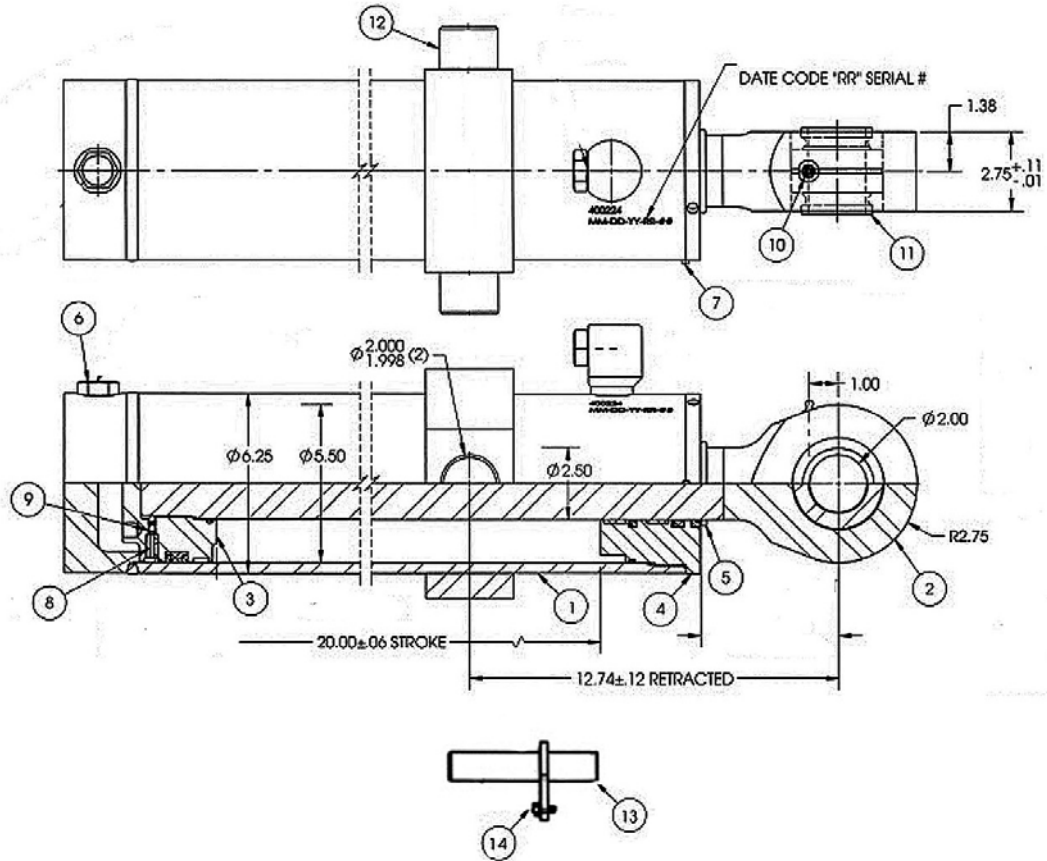

ITEM	PART	DESCRIPTION
	400224	LIFT CYLINDER (5.5 X 20)
1	201870	Barrel Assembly
2	301537	Rod
3	400692	Piston
4	500847	Head Gland
5	703332	O-Ring
6	710085	O-Ring Plug
7	711004	Self-Tapping Screw
8	713103	Dowel Pin
9	715045	SHSS Cone
10	717002	Grease Fitting
11	720019	Bearing
12	714149	Pin Covers
13	600221	Pin Assembly: Front Sec. Lift
14	AFB-00128	Bolt: 1/2 X 1 Gr 5


ASHLAND SCRAPERS

Push-Off Cylinder - 400046

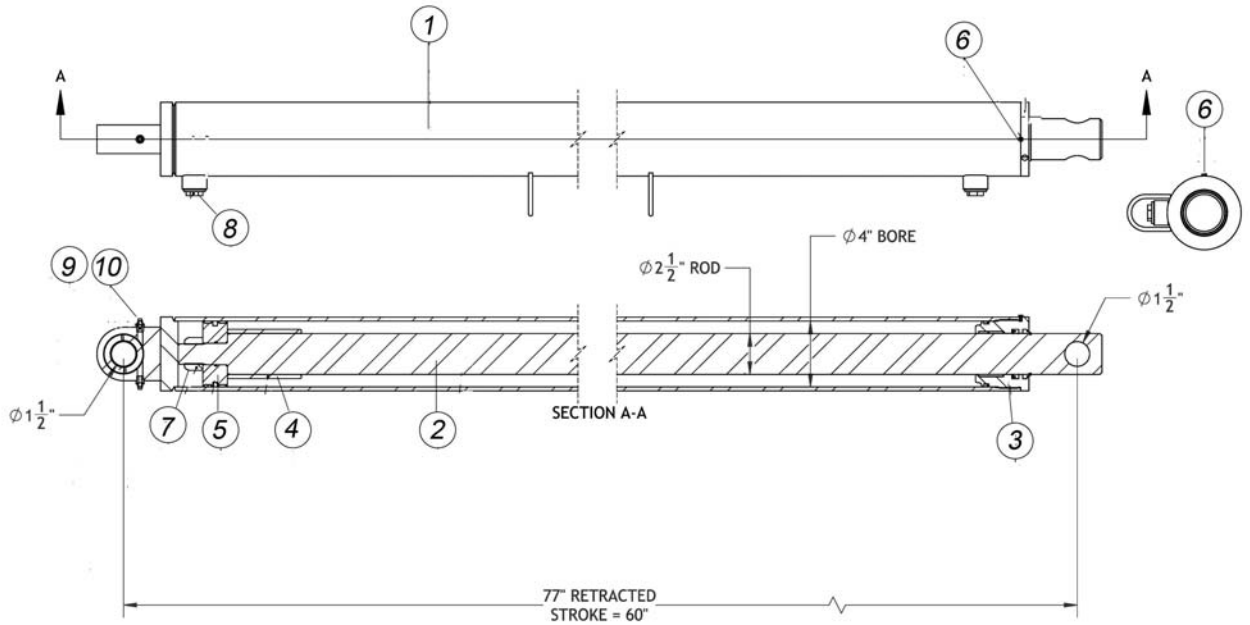

ITEM	PART	DESCRIPTION
	400046	PUSH-OFF CYLINDER (4 X 60")
1	J204143B	Barrel
2	J316476B	Rod
3	J500310B	Rod End
4	J320750B	Sleeve
5	J401403A	Piston
6	J811128A	Screw: Locking
7	J712025A	Nut
8	J714048A	Plug: Fitting
9	J714165A	Cap
10	J717000A	Grease Fitting
	431962B	Seal Kit


Decals (215TS2)

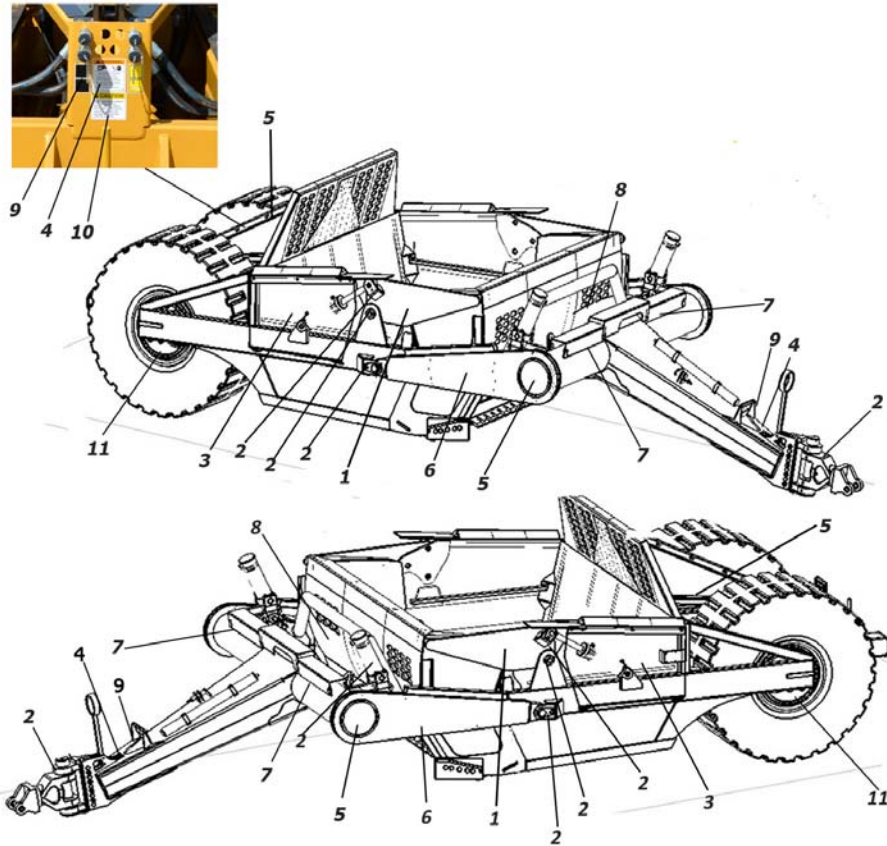

ASHLAND SCRAPERS**Decals (215TS2)**

ITEM	PART	DESCRIPTION
1	ADS-00011	Pinch Point
2	ADS-00019	Grease Twice Daily
3	ADS-00015	'Caution' Tandem Use
3	ADS-00059	Model 215 TS2 Badge
4	750464	High Pressure Fluid Hazard
5	ADS-00065	"AI" Logo Large
6	ADS-00062	"ASHLAND" Large
7	ADS-00002	"Ashland" Small
8	A123286	Depth Gauge
9	ADS-00041	Plumbing Controls
10	ADS-00015	Caution-Tandem Use
11	ADS-00054	Tighten Bolt Guide

Hydraulic Accumulator

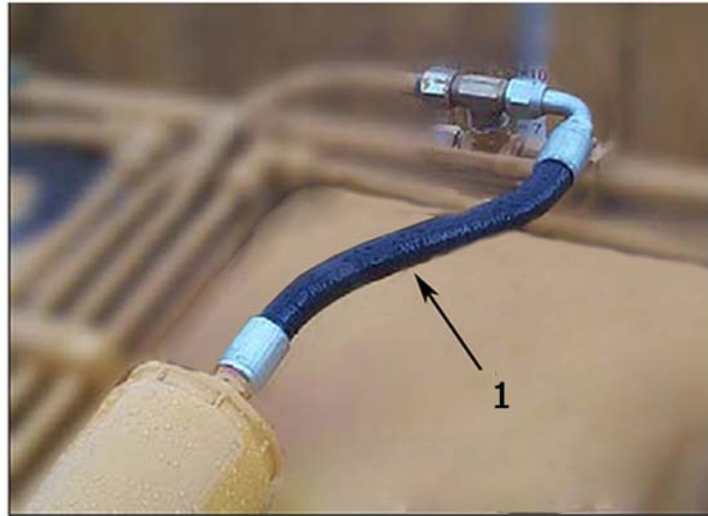

ITEM	PART	DESCRIPTION
1	A155H67	Hose, 3/4" X 16" MORB with sweep
2	A125009	Bracket, Welded with bolts
3	A125005	Accumulator Cylinder

ASHLAND SCRAPERS

Hydraulic Manifold - A125174



ITEM	PART	DESCRIPTION
1	A125162-02	PUSHOFF SEQUENCE CARTRIDGE
2	A125162-01	COUNTER BALANCE CARTRIDGE

SETTING THE APRON AND PUSHOFF VALVE

The manifold block containing the pushoff sequence valve cartridge and apron sequence valve cartridge is used to control two hydraulic circuits with one hydraulic remote. When the tractor hydraulic remote is activated, oil flows first to the apron cylinders until they are fully extended. Once the cylinders are fully extended, the apron circuits' hydraulic pressure begins to increase. Once the pressure threshold is surpassed (which is adjustable. See adjustment section), the sequence valve diverts the oil flow to the pushoff's hydraulic circuit. Once the push off is completely extended the operator then reverses the tractors hydraulic remote. The counterbalance valve will hold the apron open until the push off is fully retracted. The Apron sequence valve then opens and allows the apron to close.

Setting the valves:


STEP 1 PUSHOFF SEQUENCE VALVE

Loosen the lock nut (9/16") on the sequence valve cartridge. Turn the setscrew (4mm) clockwise until the front apron rises before the push-off begins to advance. (Earthmover should be empty) Turn the adjustment screw an additional 1/4 turn clockwise and tighten jam nut.

STEP 2 COUNTER BALANCE VALVE

Loosen the lock nut (9/16") on the counterbalance valve cartridge. Turn the setscrew (4mm) counter-clockwise until the apron holds in a raised position while rear gate is being retracted. Turn adjustment screw an additional 1/4 turn, tighten jam nut. DO NOT tighten adjusting screw more than necessary.

Hydraulic Valve Ports

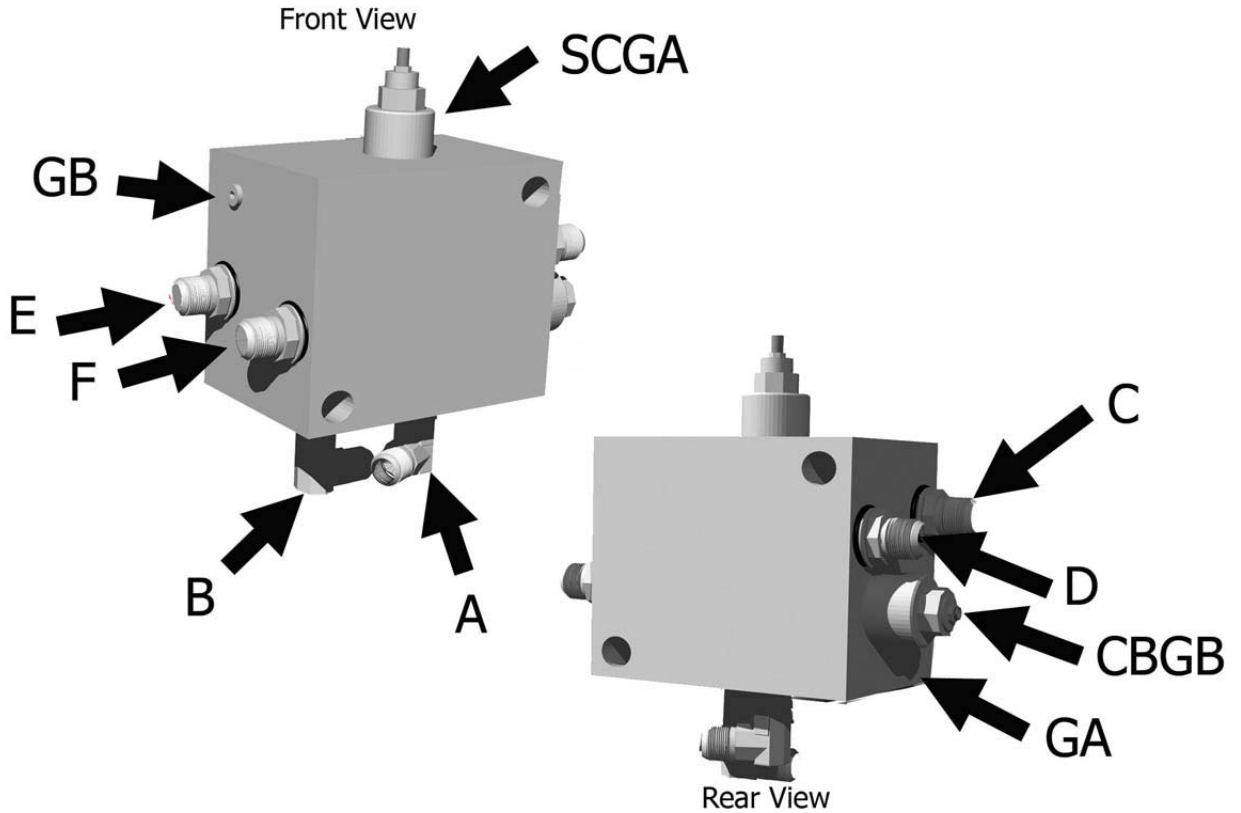


The lettering for the port locations are stamped on the block

A350P010

ITEM	PART	DESCRIPTION
A		Supply Line
B		Pushoff Cyl., (Rod End)-Apron Cyl., Right side (Base End)-Supply Line
C		Pushoff Cylinder, (Base End)
D		Apron Cylinder, Right side, (Rod end)
E		Apron Cylinder, Left side, (Base end)
F		Apron Cylinder, Left side, (Rod end)
CBGB		Counterbalance Valve, adjustable
SCGA		Sequence Valve, adjustable
GA		Pressure test port
GB		Pressure test port

Hydraulic Valve Seals

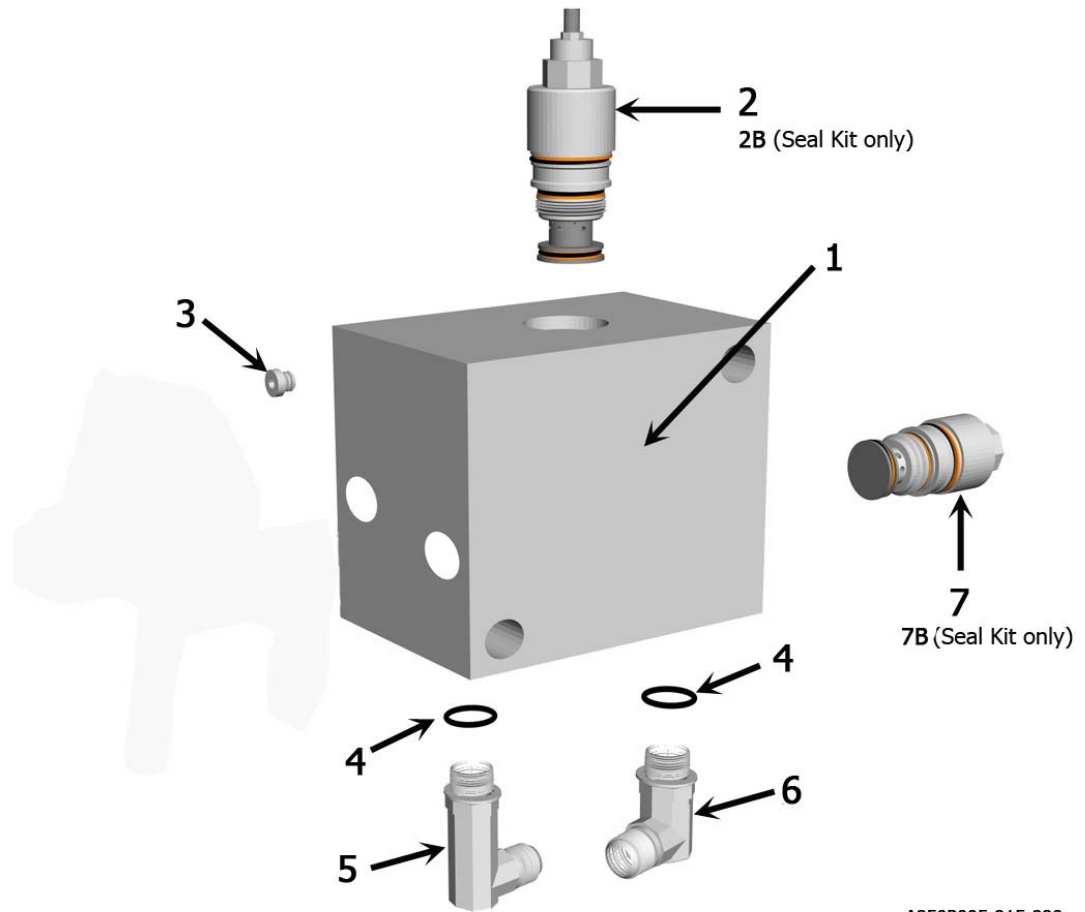

A350P005-215-220

ITEM	PART	DESCRIPTION
1	A125174	Valve: Manifold Block IV Body
2	A125162-02	Valve: Sequence Cartridge for Ver. III & IV
2b	A125162-02 KIT	Seal Kit for A125162-02 Valve Cartridge
3	AHS-00046	6 ORB Plug
4	AHS-00153	O-Ring for M ORB Fitting
5	AHA-00047	Adapter: 90 Deg. XL 3/4 MJX 1 1/6 M ORB
6	AHA-00044	Adapter: 90 Deg. 3/4 MJ X 1 1/6 M ORB
7	A125162-01	Valve: Counterbalance Cartridge for Ver. III & IV
7b	A125162-01 KIT	Seal Kit for A125162-01 Valve Cartridge

ASHLAND SCRAPERS


Service: Grease Locations TS



1. Hitch – Horizontal and vertical pins.
2. Lift Cylinders – Rod end & Base End; Both left & right sides.
3. Front Arm Pivot Joint – Both left & right sides.
4. Apron Cylinders – Rod clevis pin; Both left & right sides.
5. Apron Pivot Pin – Both left & right sides.
6. Hold-down Rollers – Both left & right sides.
7. Floor Rollers – Both left & right sides.
8. Tapered Rollers – Both left & right sides.


Hub-Axle Assembly

1. Lubricate bearings cones (item 7,X2).
2. Install (1) bearing cones onto axle.
3. Install new o-rings (item 3, x2) onto axle.
4. Install bearing spacer against lubricated bearing.
5. Install (1) lockwasher against bearing spacer with internal tab positioned in keyway of axle.
6. Install (1) locknut. Torque to 50 ft-lb. Bend appropriate lockwasher tab into locknut slot.
7. Install axle assembly into hub from "fixed" end.
8. Repeat steps 2-5 for parts on "pre-load" end of hub.
9. Install locknut and torque as follows:
 - Initial torque locknut to 200 ft-lb.
 - Back off locknut one full turn.
 - Rotate axle at least 5 revolutions.
 - Torque locknut to 50 ft-lb while rotating axle.
 - Back off locknut 1/4-1/2 turn.
 - Final torque locknut to 55-65 in-lb.
10. Bend appropriate lockwasher tab into locknut slot.
11. Lubricate seals and install into hub.
12. Install retaining rings (item 8,x2).

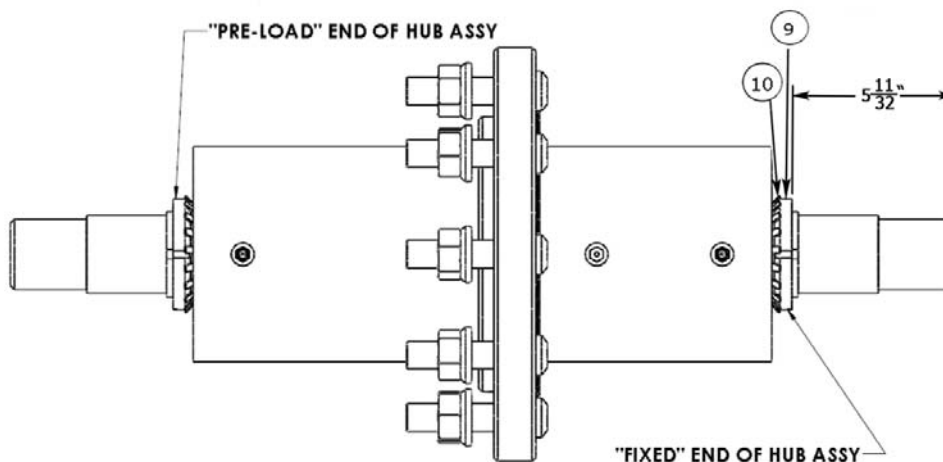

ASHLAND SCRAPERS**Hub-Axle Disassembly**

1. Disengage lock tab on "pre-load" side of axle lockwasher (item 10).
2. Remove axle locknut (item 9) and lockwasher (item 10).
3. Remove seal retaining rings (item 8, x2).
4. Remove hub seals (item 5, x2).
5. Remove axle (item 2) out "fixed" end of hub.
6. Remove bearing spacers (item 4, x2).
7. Remove bearing cones (item 7, x2).
8. Remove o-rings from axle (item 3, x2).

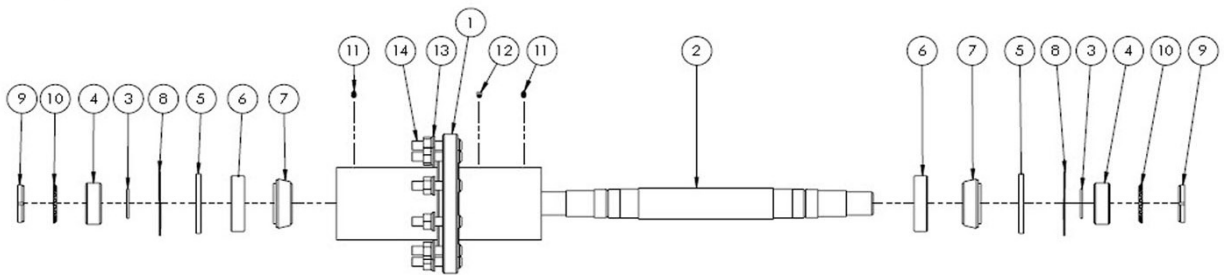

Scraper Specifications 215TS2



I-215TS2 SPECIFICATIONS

CAPACITY, STRUCK	15.5 cu yd
CAPACITY, HEAPED	21.5 cu yd
OVERALL DIMENSIONS: Length Width Height	365 in. 143 in. 101 in.
APRON CLEARANCE:	56"
WEIGHT: (empty)	24,720 lbs.
CUTTING WIDTH:	126 in.
DEPTH OF CUT:	8"
DEPTH OF SPREAD:	0-18"
BLADE: 5 pc. Center Corner Router	1 1/8 x 18 x 54.25 in. 7/8 x 13 x 35/5 in. 1 x 9 x 20 1/4 in.
CYLINDERS: Apron Lift Pushoff	Two (5 x 13) in. Two (5.5 x 20) in. Two (4 x 60) in.
HORSEPOWER REQUIREMENTS: Single (Tractor)	 400-620 hp

ASHLAND SCRAPERS
Tire Inflation

TIRE INFLATION & TORQUE CHARTS

TIRE INFLATION (PSI)				
Scraper Model	Front Tire Size (XL)	Max PSI	Rear Tire Size	Max PSI
25			11L-15 8 Ply	35
50			16.5L-16.1 10 Ply	36
950	16.5L-16.1 10 Ply	36	16.9-24 8 Ply	35
140	550/45-22.5 16 Ply	41	18.4-26 18 ply	46
140 LGP	550/45-22.5 16 Ply	41	23.5-25 20 Ply	44
155	20.5-25 12 Ply	38	29.5-25 28 Ply	62
175	20.5-25 12 Ply	38	29.5-25 28 Ply	62
175 (Big Tire)	23.5-25 20 Ply	44	29.5-25 28 Ply	62
215			20.5-25 20 Ply	65
220			20.5-25 20 Ply	65
2014			20.5-25 20 Ply	65

On new machines, the wheels should be retorqued after the first two hours of use. Then check tires daily to ensure correct inflation levels. Check tire pressure with an accurate gauge having 6.9 kPa (0.07 bar) 1 psi gradations. Check tires daily to ensure correct inflation levels. Also check for:

- Tire Damage
- Loose or missing wheel lugs, nuts or caps
- Uneven wear
- Damaged Rims

Standard Torque Chart:

Torque Ft-lbs	Bolt Diameter
12	1/4"
25	5/16"
45	3/8"
70	7/16"
110	1/2"
150	9/16"
220	5/8"
380	3/4"
600	7/8"

ASHLAND SCRAPERS**Maintenance Check List**

1. Grease all zerks.
 - a) Every 8 hours of operation.
 - b) See Lubrication Points section on next page.

2. Greasing the hubs.
 - a) Re-pack wheel bearings after 300 hrs of operation.
 - b) Completely clean grease out of hub and bearings every 1200 hours of operation.

3. Check tire pressure.
 - a) See Tire Pressure Chart.

4. Check all pins for signs of wear.
 - a) Daily

5. Check wheel lug nut torque.
 - a) After first 2 hours of operation.
 - b) Recheck daily for next 2 weeks.
 - c) Tighten wheel lug nuts in a star pattern.
 - d) Torque wheel lug nuts (See Torque Specifications).

6. Check and retighten all bolts.
 - a) After initial 10 hours of use.
 - b) Again after 50 hours of use.
 - c) See Torque Specifications.

7. Inspect cutting edges.
 - a) Daily
 - b) Replace cutting edges when center blade has been worn to approximately 6" and side edges worn to approximately 4".



CAUTION! Failure to replace worn cutting edges may result in unnecessary wear to the earthmover sides and floor.

Note: Please specify left or right "L" shaped cutting edges when ordering replacements. Left or right side parts are determined by viewing from rear of the scraper.

ASHLAND SCRAPERS**Service: Tire Service**

The task of servicing tires and wheels can be extremely dangerous and should be performed by trained personnel only, using the correct tools and following specific procedures. Do not attempt to mount, demount or inflate a tire if you do not have the proper equipment and experience to perform the job. Call a qualified repair service to inspect the assembly and make necessary repairs. Failure to heed warnings could lead to serious injury or death.

Visually inspect tires and wheels daily. Carefully inspect any rim and tire assembly that has been run underinflated or flat before reinflating the tire to make sure there is no damage to either the rim or tire.

- ALWAYS wear personal protection equipment such as gloves, footwear, eye protection, hearing protection and head gear when servicing tire and wheel components.
- DO NOT operate with damaged rims, tire cuts or bubbles, missing lug bolts or nuts or damaged rims.
- ALWAYS maintain the correct tire pressure. NEVER exceed recommended tire inflation pressure.
- INSPECT any rim and tire assembly that has been run flat or severely underinflated before reinflating the tire. Damage to the rim and tire may have developed.
- NEVER inflate a tire that has lost air pressure or has been run flat without determining and correcting the problem.
- NEVER try to repair wheel, rim, or tire components parts. Parts that are cracked, worn, pitted with corrosion, or damaged must be discarded, and replaced with good parts.
- ALWAYS use approved tire and rim combinations for the model scraper that you have and verify that part numbers of components are correctly matched for the assembly.
- ALWAYS exhaust all air from the tire prior to demounting.
- ALWAYS place wheel and tire assemblies in restraining devices (safety cage) when inflating tires. Use a clip-on chuck and long extension hose to allow you to stand to the side of the tire and not in front of it.
- NEVER weld or cut on an inflated tire assembly. Welding heat can cause increased pressure which could result in tire explosion.
- ALWAYS use proper lifting techniques, and mechanized lifting aids to move heavy components and assemblies.
- NEVER leave a tire, wheel, or assembly unsecured in a vertical position.
- ALWAYS take care when moving tires and wheels that other people in the area are not endangered.

ASHLAND SCRAPERS
Tools Required

SAE Tool Sizes Required to Service Ashland Scrapers	
Direct-Mount Scrapers	1-215 -220
Hitch	
Hitch Pin	2-1/4"
MDU Hitch	3-3/4"
Super Swivel Hitch	3-3/4"
Secure Hitch to Front Section	1-1/2"
Dolly-Wheeled Scraper	
Sockets	
Ball	
Front Section	
Trunion Blocks	1-1/8"
Accumulator Clamps	3/4"
Plumbing	
Steel Hyd. Lines	1-1/4"
Steel Hyd. Lines Clamps	1/2"
Rubber Hyd. Lines 3/4"	1-1/16"1-1/4"1-3/8"
Rubber Hyd. Lines 1/2"	
Bulk-Head adaptors	1-3/8"
Dirt Shields	9/16"
Plumbing	
Steel Hyd. Lines	1-1/4"
Steel Hyd. Lines Clamps	1/2"
Rubber Hyd. Lines 3/4"	same
Rubber Hyd. Lines 1/2"	same
Blades	
Blades	1-1/2"
Automatic Sequencing Valves	
Cartridge, Sequence Jam Nut	9/16" Jam Nut
Cartridge, Sequence, Adj. Set-Screw	5/32" Allen Wrench
Cartridge, Counter Balance, Jam Nut	9/16" Jam Nut
Cartridge, Counter Balance, Adj Set-Screw	5/32" Allen Wrench
Pressure relief valve, Cap & Jam Nut	
Pressure relief valve, Adj. Set-Screw	
Ejector	
Dirt Shields, Ejector	3/4"
Braces	1-7/8"
rollers	15/16"
Slides	1-1/8"
Wear pads	
Wheels	
Hub, Internal	
Hub, wheel nuts or bolts	
Axle	1-7/8" 2"
Brakes (VCE machines only)	
Brakes	
Miscellaneous	
Grease fitting	5/16"7/16"
Grease Lines	7/16"1/2"
Apron Pivot Pins	
Dirt Shields	9/16"

ASHLAND SCRAPERS**Troubleshooting**

With proper care and maintenance, your Ashland Scraper will give many years of reliable service. When a situation arises where the earthmover performance is not satisfactory, this section will give some pointers on finding and correcting the problem.

Grease zerk will not take grease.

1. Grease zerk plugged.
 - a) Remove and replace grease zerk.
2. Pin is frozen.
 - a) Remove, clean, and inspect pin.
 - b) Replace pin if necessary.
3. Bushing grease passage is not aligned with grease zerk.
 - a) Remove, clean, inspect, and realign bushing.
 - b) Replace bushing if necessary and realign.

Push-off rollers do not roll.

1. The rollers need lubrication.
 - a) Check zerk hole and grease.
 - b) Remove pin, clean, inspect, and replace if necessary.
2. The roller bushing is worn out.
 - a) Remove roller assembly and replace bushing.
 - b) See parts manual.

Cylinders will not hold in preset position, i.e. the cylinder creeps.

1. Seals leaking internally.
 - a) Remove and replace seal kit.

Machine cuts unevenly.

1. Cutting edges worn unevenly.
 - a) Replace cutting edges.
2. Improperly inflated tires.
 - a) Check air pressure in tires.

ASHLAND SCRAPERS**Warranty Statement****The Purpose of Warranty**

Ashland Industries warrants each new product to be free from defects in material and workmanship. This warranty is applicable only for the normal service life expectancy of the product or components, not to exceed one year from the date of delivery of the new Ashland Industries product to the original purchaser, or the date the product is first put into service via a rental agreement or other means, whichever occurs first.

Dealer Responsibilities

The following responsibilities are to be performed when the dealer delivers a product to the purchaser or otherwise places it into warranty service:

Complete the Warranty Registration Form and forward it to Ashland Industries within 30 days of the sale, rental or other use of the product. Warranty reimbursement is contingent upon product registration.

Review the warranty statement and operator's manual with purchaser to assure understanding of purchaser's responsibilities as related to warranty, service, and the proper and safe operation of the product. Purchasers/Renters should be advised to have failed parts repaired or replaced immediately upon failure, as continued use will result in additional damage, excessive wear, and may result in personal injury.

Contact Ashland Industries prior to beginning repair or replacement of failed parts to make certain that the cost of repairs are consistent with the value of the product being sold.

Warranty requests for units in dealer's inventory may be submitted to Ashland Industries when defects are noted in products prior to the retail sale or rental of that unit.

Provide warranty and service repairs as directed by Ashland Industries' "Service Repairs Bulletins" or other instructions.

All warranty work must be completed within 30 days of failure. Notify Ashland Industries' warranty department if repairs will require more than 30 days after failure for an extension. No claim will be accepted for warranties that exceed this 30 day period.

No warranty will be allowed on units delivered to the retail customer prior to the full payment of that unit to the manufacturer by the dealer.

If diagnostic time is required, contact Ashland Industries Inc. prior to beginning the warranty repair for approval. Ashland Industries must approve travel time reimbursement prior to beginning the warranty repair.

Ashland Industries Responsibilities

Reimbursement for parts used in warranty repair will be credited only when the parts are purchased from Ashland Industries Inc. Parts will be credited at dealer's net cost. No warranty will be allowed on parts that are past due.

Dealer should use parts from their parts inventory first. In the event that parts must be shipped from Ashland Industries Inc., freight will be paid by Ashland Industries and will be shipped by the most economical means to arrive in the shortest possible time. Air, Next Day Air, Priority and other special shipment methods requested by the dealer will be at the customer's expense.

Warranty Labor Reimbursement for labor expense to the dealer is made by payment of the established hourly shop rate.

Repair times will be reviewed by Ashland Industries Inc. and may be adjusted to average repair time required by other dealers to make similar repairs. Labor is not paid on the warranty associated with repair parts purchased by the retail customer that are used on a product that is not currently in warranty time frame.

Reimbursements for repairs made by an outside source (not dealer personnel) will be made for those services deemed necessary for the resolution of the warranty by Ashland Industries' warranty department.

Outside repair invoices must have prior approval from Ashland Industries' service department and must be attached to the warranty claim after approval.

ASHLAND SCRAPERS**Warranty Statement****Other Warranty Provisions**

The following guidelines are to be followed when performing warranty repairs:

In all cases, the most economical repair should be performed unless otherwise directed. Credit will not be allowed for assemblies or groups if it is practical to make the repair with individual parts. In some cases, the assembly or group price may be less than the total of the parts and labor required to complete the repair. In those cases, an assembly or group may be used.

Only those parts provided by Ashland Industries are covered under Warranty. The use of parts from other sources will not be eligible for warranty consideration.

All parts removed during warranty repair should be held for a period of 90 days after the warranty claim has been submitted to Ashland Industries Inc. These parts can be discarded if disposition or return request hasn't been made during this period. Parts that are requested must be returned within 30 days of claim disposition. These parts will be discarded after the 30 day period.

Ashland Industries Inc. reserves the right to deny or reverse any and all warranty claims for parts, labor or miscellaneous charges when errors are found, warranty provisions are abused, or fraudulent claims are submitted.

Warranty Reimbursement is Not Possible

When failure falls under the "limitations" as identified in Ashland's Limited Warranty Statement.

When Ashland Industries has requested the return of certain parts, assemblies or information and has not received the material with 30 days of date posted on return request.

On claims due to damage or shortage that are obviously the responsibility of dealer or the delivering carrier.

On the entire claim when warranty policy and provisions are not followed.

All dealers will warranty their technician's work to the purchaser and will indemnify Ashland Industries Inc. from such claims.

Service Bulletins

Service Bulletins will be issued when necessary to alert dealers of special repairs. Each bulletin will give detailed directions and procedures to complete the service.

Procedures For Completion Of Warranty Form

Complete the warranty form available at www.ashlandind.com or in your dealer's yellow Ashland Sales Book. Return this form to Ashland Industries within 30 days of failure.

Use of Photos

Pictures of the failure are recommended but not required. Photos should be attached to dealer's claim when their inclusion will help identify the condition of the part being repaired or replaced, and thus assisting in approval of the claim. In many cases, the use of photos may eliminate the need to return parts for evaluation. Photos will not be returned unless specifically requested. Digital photography will also be acceptable and can either be mailed or email to warranty@ashlandind.com

Delayed Warranty Repairs

Warranty repairs should be scheduled and performed as soon as possible after notifying dealer and Ashland Industries. There may be circumstances that require the use of the product for a short period of time by the retail customer, or the availability of repair parts may require the work to extend past a 30 day period. In these cases, the dealer must notify Ashland Industries in writing of the extenuating circumstance and advise that the continued use of the product will not enlarge the warranty claim. These claims will then be processed as if the product is still within the warranty period.

Denied Claim

Dealers will be notified of a denied claim in writing, and notification will state the reason for denial. A dealer has the right to appeal this claim and must do so within 30 days of notification of denial. If there has been no appeal within the 30 day period, the claim will be considered closed.

ASHLAND SCRAPERS**Warranty Statement****Limited Warranty Statement**

Ashland Industries Inc. warrants each new product to be free from defects in material and workmanship. This warranty is applicable for products or components, not to exceed one year from the date of delivery of the new Ashland Industries product to the original purchaser, or the date the product is first put into service via a rental agreement or other means, whichever occurs first.

The major components of swivel hitches used on Industrial series scrapers are warranted for three consecutive months from the date of delivery of the new Ashland Industries product to the purchaser, or the date the product is first put into service via a rental agreement or other means, whichever occurs first, except those components described below.

Genuine Ashland Industries Inc. replacement parts and components will be warranted for 30 days from date of purchase, or the remainder of the original equipment warranty period, whichever is longer.

Under no circumstances will it cover any merchandise or components thereof, which in the opinion of the company, has been subjected to misuse, unauthorized modification, alterations, an accident or if repairs have been made with parts other than those obtained through Ashland Industries Inc.

Ashland Industries Inc. in no way warrants tires since their respective manufacturer warrants these items separately. Please call Ashland Industries Inc. to receive phone numbers of tire suppliers.

Ashland Industries Inc. in no way warrants wearable items such as cutting edges, front dolly wheel balls, socket halves, rollers, bushings, yoke hitch pins, hitch bushings, etc.

Our obligation under this warranty shall be limited to repairing or replacing, free of charge to the original purchaser, any part that, in our judgement, shall show evidence of such defect, provided further that such part shall be returned within 30 days from the date of failure to Ashland Industries Inc. routed through the dealer and distributor from whom the purchase was made, transportation charges prepaid. Upon warranty approval proper credits will be reimbursed for transportation.

This warranty shall not be interpreted to render Ashland Industries Inc. liable for injury or damages of any kind or nature to person or property. This warranty does not extend to the loss revenue, extra labor cost associated with downtime, substitute machinery, rental or for any other reason.

Except as set forth above, Ashland Industries Inc. Shall have no obligation or liability of any kind on account of any of its equipment and shall not be liable for special or consequential damages. Ashland Industries Inc. make no other warranty, expressed or implied, and, specifically, Ashland Industries Inc. disclaims any implied warrant or merchantability or fitness for a particular purpose. Some states or provinces do not permit limitations or exclusions of implied warranties or incidental or consequential damages, so the limitations or exclusion in this warranty may not apply.

This warranty is subject to any existing conditions of supply which may directly affect our ability to obtain materials or manufacture replacement parts.

Ashland Industries Inc. reserves the right to make improvements in design or changes in specifications at any time, without incurring any obligation to owners of units previously sold. No one is authorized to alter, modify or enlarge this warranty nor the exclusion, limitations and reservations.

Owner Registration

Be sure to complete the Owner Registration form that you received with your machine and return it to Ashland Industries within 30 days of the sale, rental or other use of your product. Warranty reimbursement is contingent upon product registration. If your product is not registered, it is NOT covered under warranty.